

Warranty

**24**  
Months

Option

Length-measure.

**High capacity test stand:**

- **Manually operated** test stand for tension and compression tests
- **No electrical power needed** to operate this test stand
- **Heavy duty construction** for reliable tests and easy operation



		TVH 50K	TVH 200k	TVH 300k
<b>Capacity</b>		50 000 N	200 000 N	300 000 N
<b>Inner dimensions</b>				
Height of Stroke (a)	Min	0 mm	0 mm	0 mm
	Max	125 mm	125 mm	125 mm
Compression Section (b)	Min	290 mm	314 mm	358 mm
	Max	110 mm	174 mm	178 mm
Tension Section (c)	Min	360 mm	333 mm	382 mm
	Max	480 mm	573 mm	462 mm
Tension Section (c)	Min	214 mm	148 mm	52 mm
	Max	334 mm	228 mm	232 mm

**Outer dimensions**

Length		260 mm	260 mm	260 mm
Width		450 mm	470 mm	490 mm
Height		1190 mm	1170 mm	1460 mm
Weight		103 kg	206 kg	400 kg

Stroke length	Max	125 mm	125 mm	125 mm
---------------	-----	--------	--------	--------

Compatible force gauges	FH 50 K	FH 200 K	FH 500 K
-------------------------	---------	----------	----------




Shown with SAUTER FH (not included in delivery)

**Application:** : Ideally test stand for tarmac tests

**Mobility:** Easy operation on the construction site

**Waterproof:** Can be used in any wheather

**Easy operation:** Can be safely operated by any kind of user without complex training on the machine, compared to a PC-controlled test system

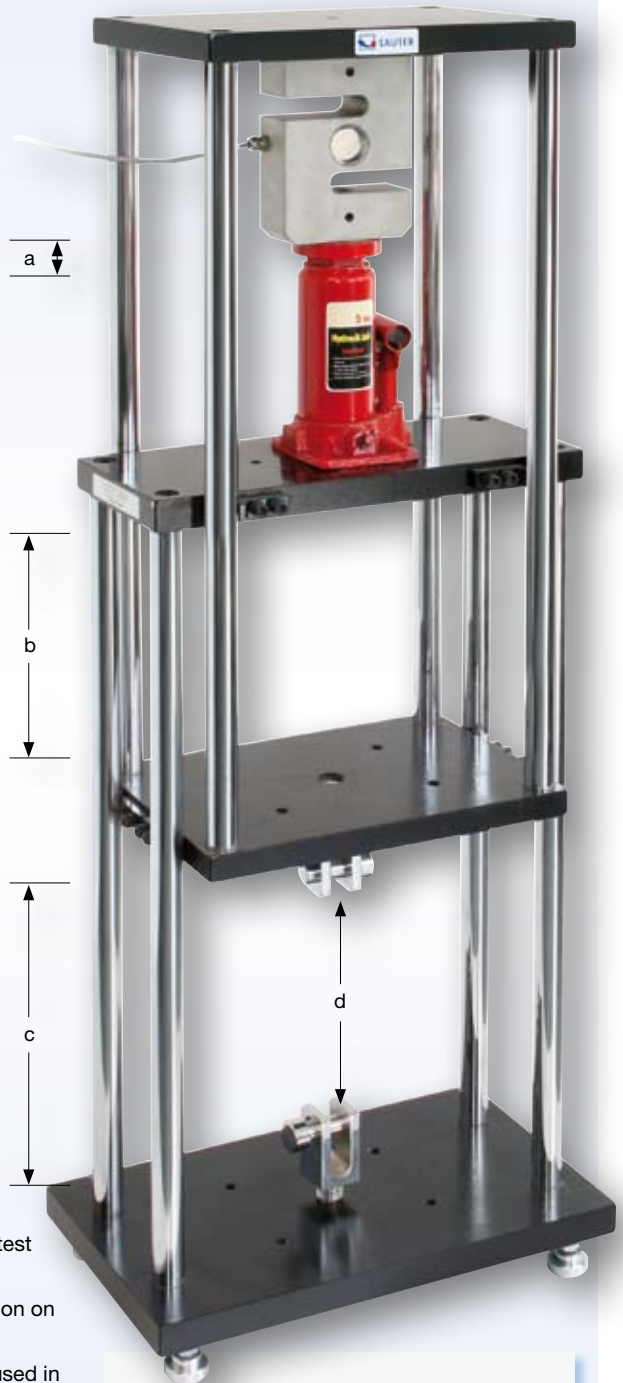

Model	Max Force	Price, ecxl. VAT
<b>TVH 50k</b>	50 000 N	€ 2 090,-
<b>TVH 200k</b>	200 000 N	€ 2 390,-
<b>TVH 300k</b>	300 000 N	€ 3 670,-